

# SS2 STAINLESS STEEL ELECTRIC ACTUATOR WITH INTEGRATED MOTOR

The all 300 series stainless-steel ERD for 10, 15 & 20 sizes incorporates hygienic design Principles and includes a protective enclosure for Tolomatic stepper/servo motors. (10 size: stepper motor only)

The SS2 has an IP69k rating (static). The SS2 is built-to-order in stroke lengths up to 0.6 m (24").

## ERD-SS2



### MULTIPLE SCREW TECHNOLOGIES

#### YOU CAN CHOOSE:

- Solid nuts of bronze (15, 20 sizes) or engineered resins (10, 15 sizes) offer quiet performance at the lowest cost
- Ball nuts offer efficiency, longer life, and higher force capability



### DURABLE IP69K SEALS

- Polyurethane for IP69k ingress protection and resistance to caustic wash-down
- Clean-in-place compatible

### MOTOR PROTECTION

Designed to protect motor with IP69k rating (static)


### SMOOTH EXTERIOR

This primary design decision eases cleanup and helps to prevent bacterial growth

### ALL 300 SERIES STAINLESS STEEL CONSTRUCTION

- 300 series stainless steel for corrosion resistance
- Simplifies and lowers cost of machine design by eliminating the need for protective guards around standard actuators

### Cutting, Slicing



### Available Options:

#### MOUNTING

- Foot Mounts
- Front Flange
- Trunnion (15 & 20 sizes)

#### ENVIRONMENTAL PROTECTION

- Food grade grease

#### SENSORS

- With mounting bracket

### Applications:

- Aligning
- Chopping
- Conveyors
- Cutting
- Diverting
- Dumping
- Filling
- Gating
- Medical equipment
- Open / close doors
- Open / close lids
- Packaging equipment
- Pick & place
- Plate positioning change
- Slicing
- Sorting
- Volumetric pumps & more!


# SS2 STAINLESS STEEL ELECTRIC ACTUATOR WITH INTEGRATED MOTOR

## Specifications (metric measurement)

ERD SIZE	MAXIMUM STROKE	SCREW CODE	LEAD	LEAD ACCURACY	BACKLASH	MAXIMUM THRUST	DYNAMIC LOAD RATING
	mm		mm/rev	mm/300mm	mm	N	N
10	254.0	SN01	25.4	0.18	0.18	188	NA
		SN02	12.7	0.18	0.18	188	NA
		SN05	5.08	0.18	0.18	188	NA
		BNM05	5.00	0.87	0.13	445	1068
15	304.8	SN01	25.4	0.15	0.18	334	NA
		SN02	12.7	0.13	0.18	334	NA
		SN05	5.08	0.15	0.18	334	NA
		BNM05	5.00	0.87	0.13	890	2002
20	609.6	BNM10	10.00	0.87	0.13	890	1779
		BZ10	2.54	0.15	0.20	890	NA
		BNM05	5.00	0.87	0.13	2224	4003
		BNM10	10.00	0.87	0.13	2224	4003
		BNM20	20.00	0.87	0.10	2224	11387
		BZ10	2.54	0.15	0.20	2224	NA

# ERD-SS2

## Dimensions SIZE: 10, 15, 20

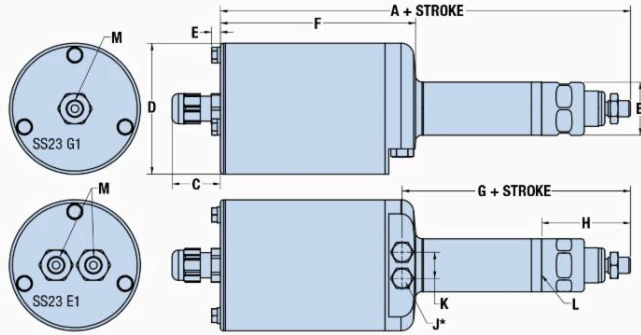

	ERD10	ERD15	ERD20
A mm	204.0	282.70	311.4
B mm	26.42	41.61	52.10
C mm	24.00	24.00	24.00
D mm	65.10	89.00	89.00
E mm	4.39	5.27	5.27
F mm	100.99	134.98	171.64
G mm	113.56	143.76	164.80
H mm	44.17	53.04	72.48
J* mm	M6 x 1.0	M6 x 1.0	M6 x 1.0
K mm	13.00	13.00	23.37
L	Surface for mounting options		



**COMPLETE INFORMATION, SIZING SOFTWARE AND SOLID MODELS AVAILABLE AT:**  
[www.tolomatic.com](http://www.tolomatic.com)

	Code	Encoder Code	Available cable exit options:
M	SS21	G1,E1	no cord grips 1/2" NPT tapped hole
	SS22	G1,E1	no cord grips M20 x 1.5 tapped hole
		G1	1 cord grip (motor, no encoder)
		E1	2 cord grips (motor, with encoder)

\*Unit ships standard with hex bolts in these tapped holes  
 NOTE: IP67 is a static rating

Contact us at 773-528-2000 or at [sales2@flowprod.com](mailto:sales2@flowprod.com) to have us size and engineer a linear actuator solution for you!



Flow Products | 2626 West Addison Street | Chicago, IL 60618 US

[Unsubscribe](#) | [Update Profile](#) | [Constant Contact Data Notice](#)



Try email marketing for free today!